


Fiber Optic Pigtails

The LongXing brand of fiber cable assemblies are designed and manufactured in LongXing's ISO9001 registered facility. The product range covers both single mode and multimode patch cords and pigtailed which are fully qualified to RoHS standards. Assemblies are available in all major fiber optic connector types; a range of cable color options available.

LongXing supplies top quality optical fiber pigtail with very competitive prices, every single piece of pigtail is tested in the workshop before delivering to the customer. LongXing's standard technical specifications are listed below; Customer/special requirements are welcomed.

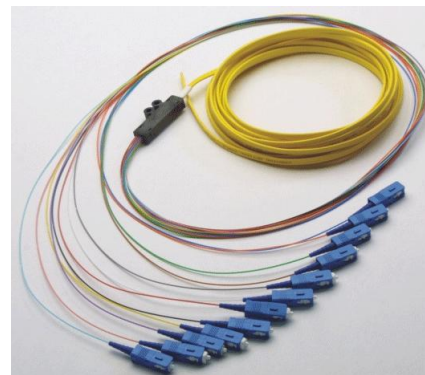

Detailed Technical Specification


Characteristics	Unit	Value/Performance
Return Loss(RL)	dB	PC \geq 45 UPC \geq 50 APC \geq 55
Insertion Loss(IL)	dB	PC \leq 0.35 UPC \leq 0.30 APC \leq 0.20
Operating Temperature	°C	-40°C~+80°C
Installation Temperature	°C	-40°C~+80°C
Storage Temperature	°C	-40°C~+80°C
Endurance	dB	Δ IL \leq 0.2
Radius of Curvature(R)	mm	\geq 30
Apex Offset	um	\leq 50
Drop (1.5m, 5 drops)	dB	Δ IL \leq 0.2, no damage
Vibration (10-55Hz, 0.75mm amplitude)	dB	Δ IL \leq 0.2
Flex (0.9kg, \pm 90°, 100cycles, for 2mm or larger cable)	dB	Δ IL \leq 0.2
Twist (1.35kg load, +2.5 turns, 10 cycles, for 2mm or larger cable)	dB	Δ IL \leq 0.2
Pull Proof (3.4kg at 90°, 6.8kg at 0°, for 2mm or larger cable)	dB	Δ IL \leq 0.2
Static Bending (60mm diameter 10 turns)	dB	Δ IL \leq 0.2
Crushing (102kg for 2mm or larger cable, 10.2kgfor 900m cable)	dB	Δ IL \leq 0.2
Salt mist	n/a	No sign of corrosion
Cold (20°C, 96 hrs)	dB	Δ IL \leq 0.2
Dry Heat (70°C, 96 hrs)	dB	Δ IL \leq 0.2
Damp Heat (40°C, 95%RH, 96 hrs)	dB	Δ IL \leq 0.2

Characteristics	Unit	G652 SM	G655 SM	Std.50um	62.5um
Max, Attenuation	dB/km	0.4 / 0.3 (1310 / 1550)	0.3 (-1550)	2.8 (-850)	3 (-850)
Min, Bandwidth	nm ² • km (nm)			500 / 500 (850 / 1300)	200 / 200 (850 / 1300)
Dispersion Coefficient	ps/nm ² • km	\leq 3.5 (1310nm)	1.0-6.0 (1550nm)		

Updated on 24 August, 2011

All drawings, designs, specifications, plans and particulars of weights, size and dimensions contained in the technical or commercial documentation of LongXing is indicative only and shall not be binding on LongXing or be treated as constituting a representation on the part of LongXing.

Ordering information:

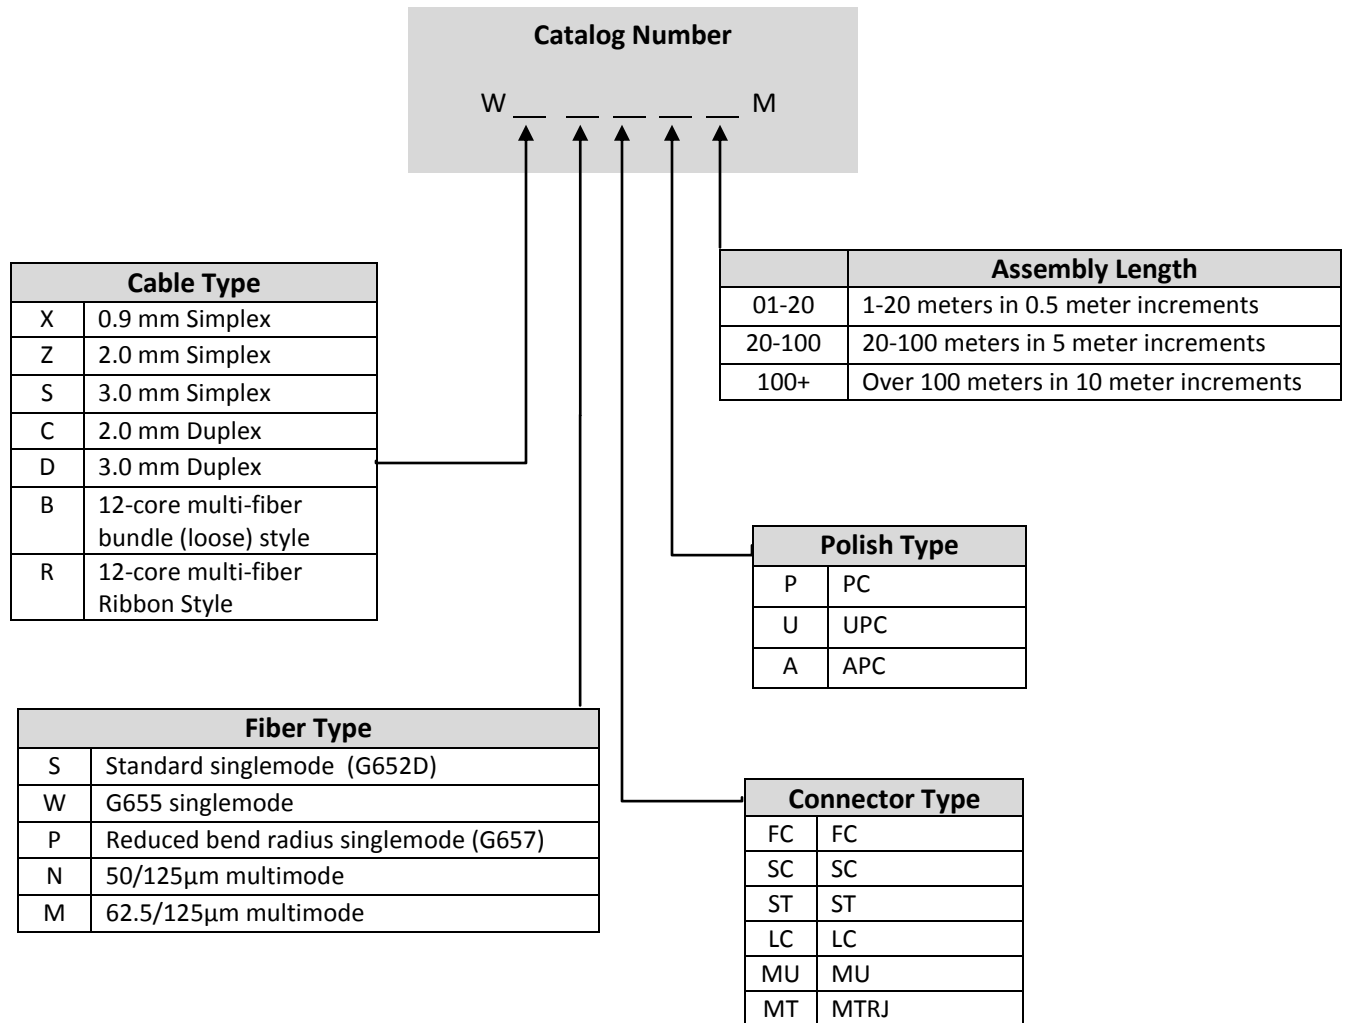

Note:

- Other cable/fiber/connector styles are available upon request.

Ordering Examples:

1. WXSFCU10M: Standard singlemode 0.9mm simplex pigtail with a FC/UPC connector on one end, 10 meters in length.
2. WBSSCA1.5M: Standard singlemode fiber, 12-core multi-fiber loose cable pigtail with 12 SC/APC connectors, 1.5meters in length.

Contact:

International Trade Department
 18, Anju Road, Beilun District, Ningbo, 315800, China.
 Direct: +86 574 87917627
 Email: info@nblxtelecom.com
 Web: www.lxtelecom.com

Updated on 24 August, 2011

All drawings, designs, specifications, plans and particulars of weights, size and dimensions contained in the technical or commercial documentation of LongXing is indicative only and shall not be binding on LongXing or be treated as constituting a representation on the part of LongXing.