

## Mini Terminal Box (ABS material) – Ideal for FTTH

(LongXing Ref: GPZ01-124P)



This mini style terminal box terminates one fiber optic cable with up to 4 cores, bringing significant improvements resulting in better customer experience when FTTH have to be deployed.

### Descriptions:

- ABS material used ensures the body strong and light.
- Easy installations: Mount on wall or just put on the ground.
- Splicing tray can be removed when needed or during the installation for the convenient operation and installation;
- Adapter slots adopted – No screws needed for installing adapters.
- Double-layer design for easier installation and maintenances:
  - Upper layer for splicing.
  - Lower layer for distribution.
- Cable fixing units provided for fixing the outdoor optical cable.
- Accommodates both cable glands as well as tie-wraps
- Fully stable patch panel, no risk of movement.
- Protected patch panel offers secure environment for adapters, patch cords and pigtails.

### Dimensions and Capability:

- Dimensions: 152mm x 30mm x 112mm (W x H x D)
- Weight: 154g (without any adapter)
- Accommodates 4 fibers with SC / FC<sup>1</sup> adapters
- Max diameter of entry cable: 12.2mm

### Operation conditions:


- Temperatures: -5°C -- 60°C
- Humidity: 90% at 30°C
- Air Pressure: 70kPa – 106kPa

### Package includes:

- Mini terminal box, 1 unit
- Heat shrink tube, 4 tubes
- Wall mount installation accessories, 1 set

<sup>1</sup> Works with LongXing plastic FC adapter (Ref: GSPFCL)

**Part Details:**

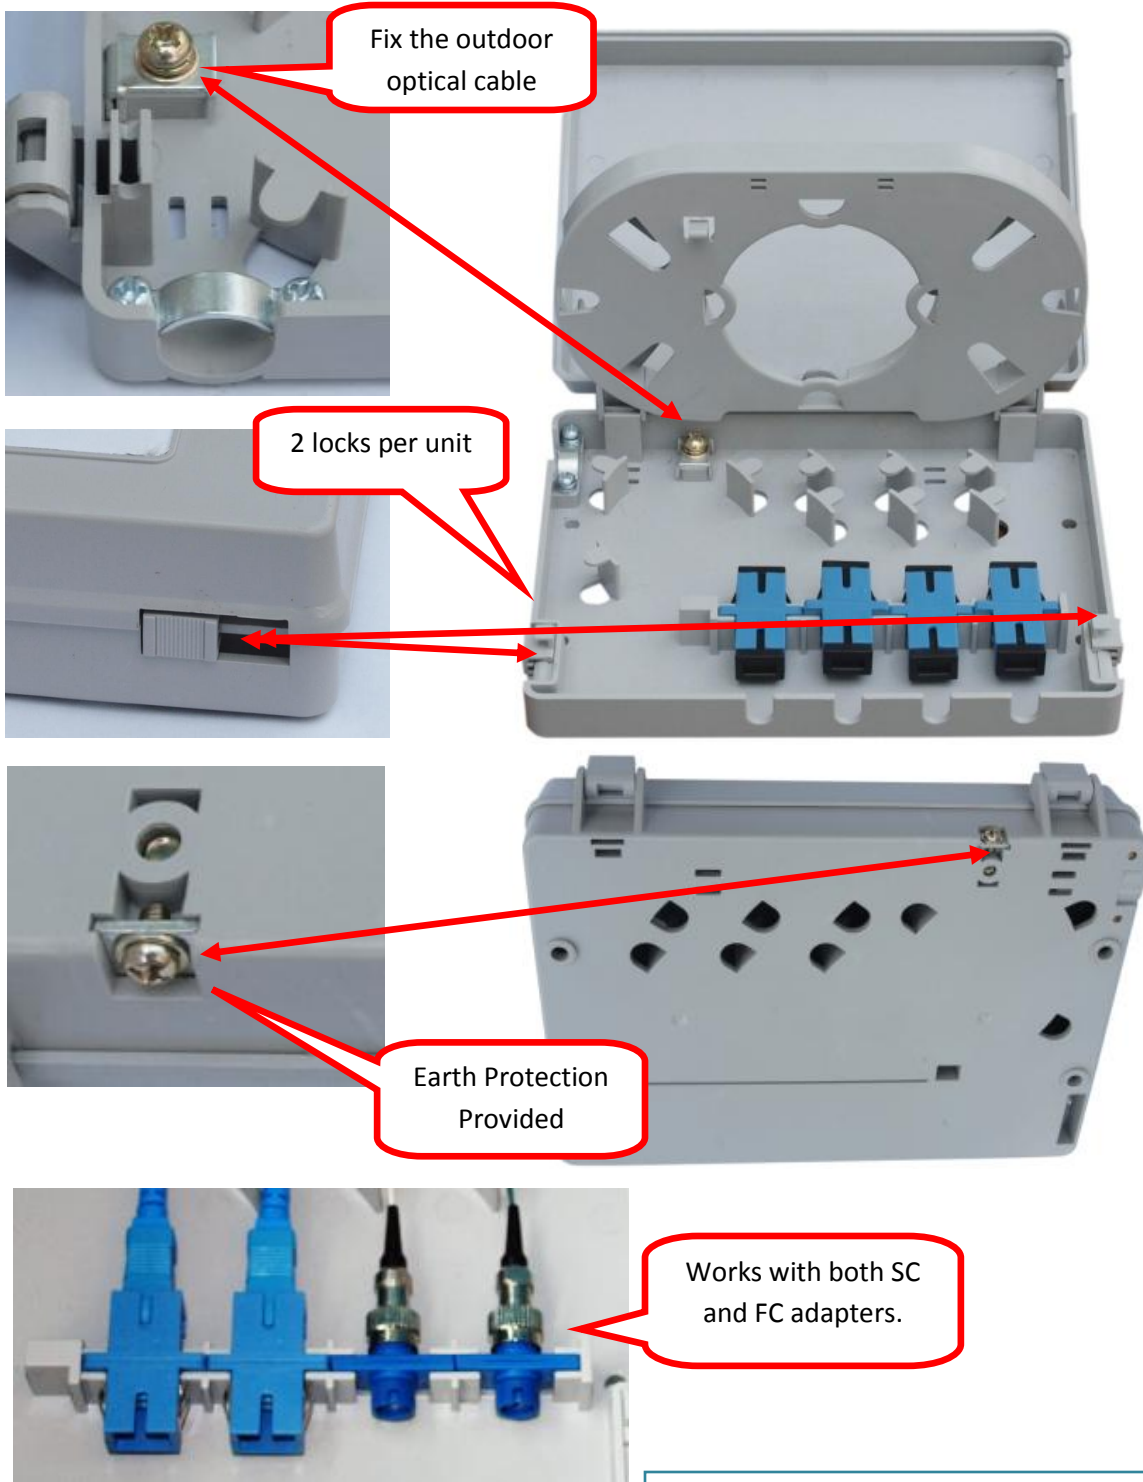

**Note:** Adapters in above pictures are for guidance only, not included in the standard package. Pre-installation option available on request when order.

**Contact:**

International Trade Department  
407, Mingzhu Rd, Hi-tech Park, Ningbo, 315040, China.  
Direct: +86 574 87917627  
Email: [info@nblxtelecom.com](mailto:info@nblxtelecom.com)  
Web: [www.lxtelecom.com](http://www.lxtelecom.com)

Updated on 03<sup>rd</sup> November, 2009

All drawings, designs, specifications, plans and particulars of weights, size and dimensions contained in the technical or commercial documentation of LongXing is indicative only and shall not be binding on LongXing or be treated as constituting a representation on the part of LongXing.